



The port reservoirs with the decisive difference

C-Port®-II

Implantable, venous
Port Catheter Systems



PHS Medical GmbH
Ederweg 3
34277 Fuldaerbrück . Germany
Tel. +49 561 998597-0 . Fax -199
info@phs-medical.de
www.phs-medical.com

C-Port®-II


Implantable, venous Port Catheter Systems



ISO 13485
Certified Quality System
CE 0483

The C-Port®-II with C-Flow® chamber differs from most conventional ports with cylindrically shaped port chambers due to the optimized geometry of the inner chamber and the base-line outlet. This ensures improved flow dynamics.

With the transparent septum of the NuPort®, which has been incorporated in the C-Port®-II, it is possible to view the chamber during implantation in order to verify venting and flushing of the port.

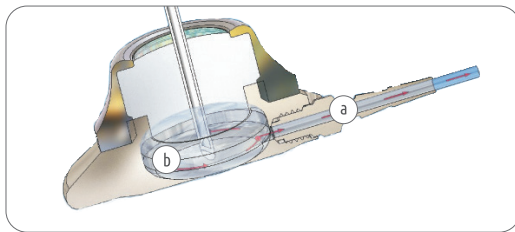

Port chamber

- a) Transparent septum and base-line outlet simplify venting of the port and minimize the risk of air embolism.
- b) The C-Flow® chamber improves the flow dynamics and reduces the risk of occlusion.



Connection

The connection mechanism enables, via audible and tactile feedback, a secure connection of the catheter to the port base. These two detection functions ensure a safe connection is guaranteed.

Technical Data:

Material, volume, weight

Port	Plastic	Volume	~ 0.5 ml
Catheter Connector	Titanium	Weight	6.3 g
Septum	Silicone		

All catheters with rounded tip and length markings in 1 cm intervals, radiopaque.

The benefits at a glance

- reduced risk of occlusion and infection
- improved flushing efficiency
- reduced maintenance cost
- facilitates blunt preparation of the port pocket
- MRI compatible up to 3 Tesla
- a variety of catheter types

Plus simplified


- blood product administration
- blood collection
- parenteral nutrition
- high viscosity medications

C-Port®-II Basic System

Single lumen, venous system for implantation via "cut-down" technique.

Content:

C-Port®-II, Catheter, Catheter lock, Huber needle, Blunt tip needle (flushing), Vein lifter (pick), 10 ml syringe.

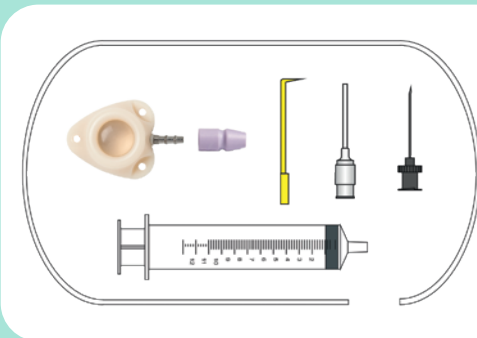


C-Port®-II Complete Set with percutaneous introducer set


for implantation via Seldinger technique.

Content:

C-Port®-II, Basic system, Introducer needle Split-Sheath cannula with dilator, Guidewire with "Thumb-Feed" guide, Tunneler

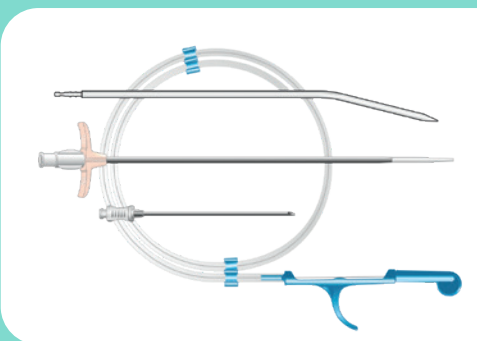

Dimensions

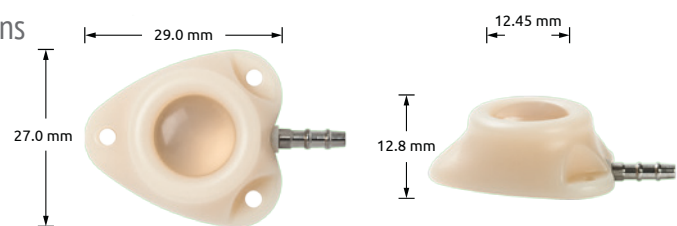

Ordering Information

Catheter	Size	O.D.	I.D.	Length
Polyurethane	6.6 F	2.20 mm	1.20 mm	70 cm
Polyurethane	7.5 F	2.50 mm	1.15 mm	50 cm
Silastic® silicone	8.0 F	2.67 mm	1.40 mm	50 cm
Polyurethane	9.0 F	3.00 mm	1.60 mm	50 cm
Silastic® silicone	9.6 F	3.18 mm	1.58 mm	50 cm

Ref. no. Basic System w/o Introducer Set

Ref. no. Complete Set incl. Introducer Set

KP-066CP	KP-066IP
KP-075CP	KP-075IP
KP-008CS	KP-008IS
KP-009CP	KP-009IP
KP-096CS	KP-096IS